




**UNIVERSAL ACCESS DOOR**  
**FOR MASONRY, DRYWALL OR PLASTER**  
**WALLS AND CEILINGS**  
**MODEL: 0900-2**

**DESCRIPTION:**

The Nailor Model 0900-2 is a multi-purpose access door. It is designed for flush installation in drywall, block or tile, walls and ceilings. Frame features rounded safety corners, concealed hinge, flush with frame fit. It has a unique white finish. Door is formed for rigidity and safety.

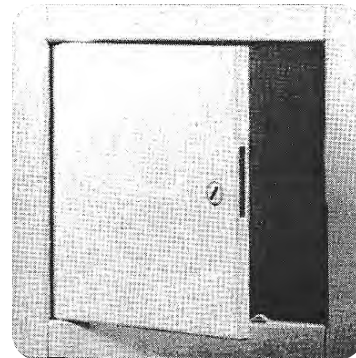

**SPECIFICATIONS:**

- Material:** Corrosion-resistant coated steel. 14 gauge (2.0) door and 16 gauge (1.6) frame.
- Finish:** Primed white finish standard.
- Door:** Flush to frame. Turned back around edges for extra rigidity.
- Frame:** The frame has pre-punched holes for simple installation.
- Hinge:** Concealed pivot pins.
- Latch:** Flush mounted screwdriver operated cam is standard.
- Packaging:** One door per carton.

**OPTIONS:**


- Type 304 Stainless steel construction. # 4 finish.
- Special size. Specify \_\_\_\_\_.
- Cylinder lock.

**STANDARD SIZES:**


NOMINAL SIZE		SHIPPING WEIGHT lbs.
inches	mm	
8 x 8	203 x 203	2.8
10 x 10	254 x 254	3.8
12 x 12	305 x 305	5.0
16 x 16	406 x 406	7.9
18 x 18	457 x 457	9.8
24 x 24	610 x 610	15.9

Wall or ceiling opening = Nominal Size + 3/8" (10).

**DIMENSIONAL DATA:**

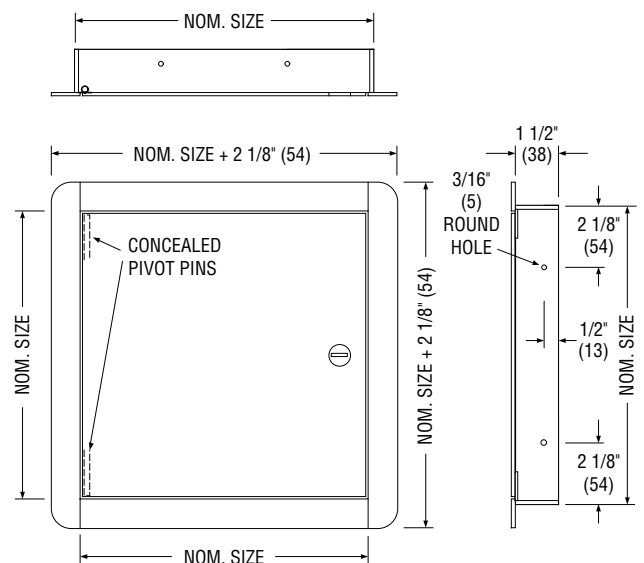

**INSTALLATION DETAIL:**

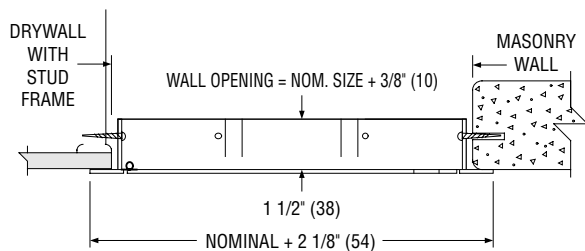

Dimensions are in inches (mm).

<b>SCHEDULE TYPE:</b>				
<b>PROJECT:</b>				
<b>ENGINEER:</b>	<b>DATE</b>	<b>B SERIES</b>	<b>SUPERSEDES</b>	<b>DRAWING NO.</b>
<b>CONTRACTOR:</b>	25 - 2 - 00R	0900	3- 96R	0900-2