





**FAN POWERED TERMINAL UNIT W/EPIC ECM MOTOR  
DISCHARGE SOUND ATTENUATORS  
MODEL SERIES: 35SXC**

**Model AT35SXC**

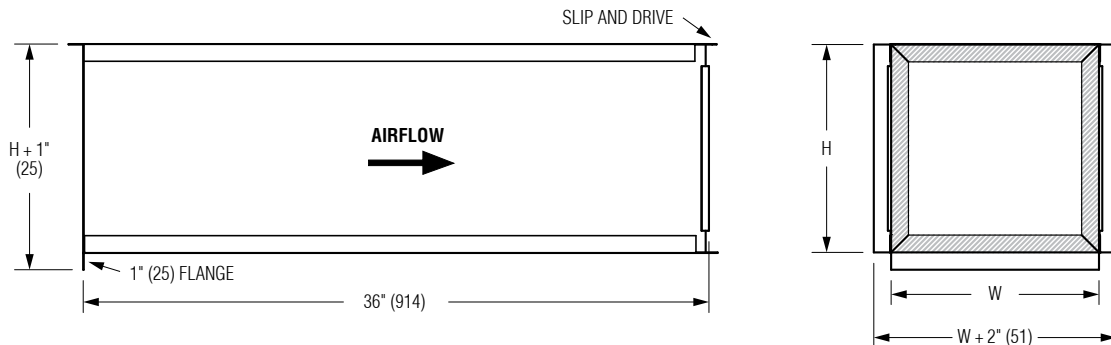

**Model AT35SEXC**

**Model AT35SWXC**

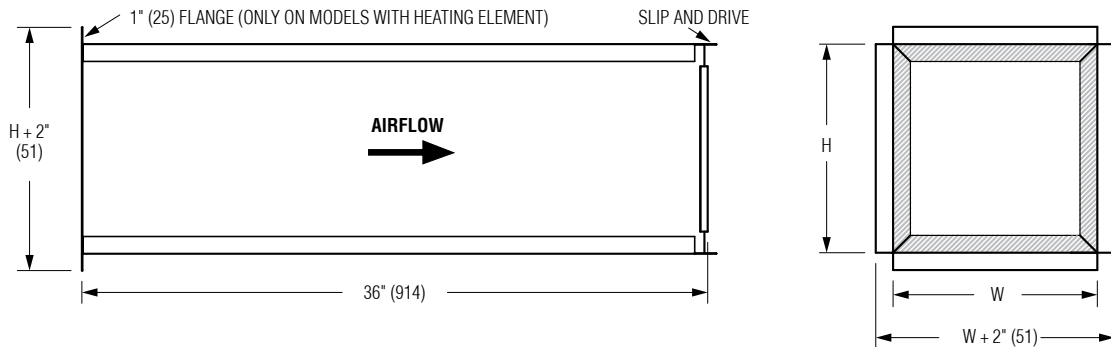

**Dimensional Data**

Unit Size	Duct Size W x H		
	Model AT35SXC	Model AT35SEXC	Model AT35SWXC
	35SXC	35SEXC	35SWXC
1	12 x 12 (305 x 305)	10 1/4 x 10 1/2 (260 x 267)	16 x 12 1/8 (406 x 308)
3	12 x 12 (305 x 305)	12 1/4 x 10 3/4 (311 x 273)	16 x 14 7/8 (406 x 378)
5	16 x 18 (406 x 457)	16 1/4 x 15 3/4 (413 x 400)	24 x 14 7/8 (610 x 378)

**DESCRIPTION:**

- 22 ga. (0.86) galvanized steel construction.  
Mechanically sealed, low leakage construction.
- Attenuators are 36" (914) in length.
- Standard liner is dual density fiberglass insulation, treated to prevent erosion. Exposed edges are sealed. Insulation meets requirements of NFPA90A and UL 181. Insulation thickness: 3/4" (19).
- Discharge attenuators are shipped loose for field attachment.

**CONNECTIONS:**

Upstream terminal connection has a 1" (25) flange. Downstream has a slip and drive connection.

**OPTIONS:**

- Fiber-free liner
- Steri-liner
- Steri-liner with perforated metal
- Perforated metal liner
- 1" (25) D. D. fiberglass liner

<b>SCHEDULE TYPE:</b>		Dimensions are in inches (mm)			
<b>PROJECT:</b>					
<b>ENGINEER:</b>	<b>DATE</b>	<b>B SERIES</b>	<b>SUPERSEDES</b>	<b>DRAWING NO.</b>	
<b>CONTRACTOR:</b>	4 - 9 - 24	3500	3 - 26 - 24	35SXC-DATT	