



# **SQUARE CEILING DIFFUSERS**

ADJUSTABLE PATTERN • LOUVERED FACE ALUMINUM • ROUND NECK • 3 CONE

MODEL: ARNSA 20 x 20 MODULE

## ■ TYPE L Lay-in T-Bar 'Sliding Type'

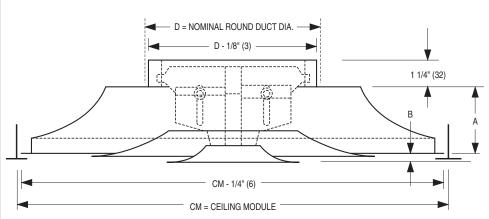



### **Horizontal Air Pattern**



## **Dimensional Data for Available Frame**

|                     |                         | Imperial  | Modules          | ;        | Metric N         | /lodules |
|---------------------|-------------------------|-----------|------------------|----------|------------------|----------|
|                     | Imperial Units (inches) |           | SI Units<br>(mm) |          | SI Units<br>(mm) |          |
| Listed              | CM = 20 x 20            |           | CM = 508 x 508   |          | CM = 500 x 500   |          |
| Neck Size           | Α                       | В         | Α                | В        | Α                | В        |
| 6 (152)             |                         | 0         |                  | 0        |                  | 0        |
| 8 (203)<br>10 (254) | 3 1/8                   | to<br>3/8 | 79               | to<br>10 | 79               | to<br>10 |

#### **DESCRIPTION:**

- Material: Aluminum construction with corrosion-resistant steel neck bracketry.
- 2. The air discharge pattern on ARNSA diffusers may be adjusted from horizontal to vertical by gradually moving the position of the inner two cone assembly from the down to an up (recessed) position - allowing a variable pattern adjustment. Model ARNSA has a 'sliding type' (friction) arrangement.
- The diffuser delivers the supply air in a true 360° streamline pattern. Excellent for VAV systems.
- 4. The ARNSA consists of three die-formed concentric cones in all sizes which eliminate mitered corners and provide uniform appearance in all neck sizes. Outer cone is one piece construction.
- 5. A spring clip arrangement permits quick, easy installation and removal of the inner cone assembly.
- 6. Diffuser has a removable plug for screwdriver adjustment of the optional damper without removing the inner core.
- 7. Standard finish is AW Appliance White.

#### **OPTIONS:**

- ☐ EX External Foil-Back Insulation, installed R-4.2 (24 x 24 max.)
- ☐ EXB External Foil-Back Insulation, ships loose R-4.2 (24 x 24 max.)
- ☐ EQT Earthquake Tabs

Finish:

- SP Special. Specify \_\_\_\_\_\_.
  - QB Quadrant Blanks:
- ☐ QB3 3-Way Blow
- ☐ QC2 2-Way Corner Blow
- ☐ QB2 2-Way Opposite Blow
- ☐ QB1 1-Way Blow

| SCHEDULE TYPE: | Dimensions are in inches (mm).  |          |             |             |
|----------------|---------------------------------|----------|-------------|-------------|
| PROJECT:       | Dimensions are in inches (min). |          |             |             |
| ENGINEER:      | DATE                            | B SERIES | SUPERSEDES  | DRAWING NO. |
| CONTRACTOR:    | 2 - 6 - 17                      | RNSA     | 3 - 10 - 16 | 4200-6C     |