






**PERFORATED CEILING DIFFUSERS**  
 CURVED BLADE • 4-WAY ADJUSTABLE DISCHARGE PATTERN  
 SQUARE NECK • SURFACE MOUNT  
**MODELS: 4340CB(-O) AND 4340CBA(-O)**

**TYPE S Surface Mount**

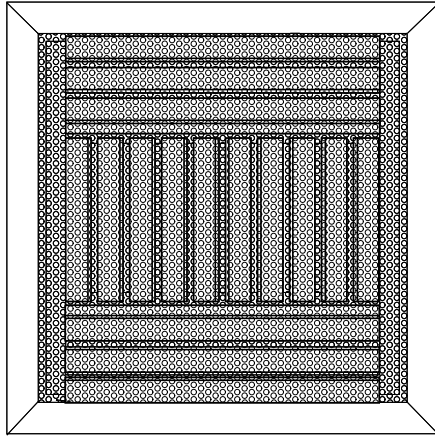

**PATTERN CONTROLLER OPTIONS**

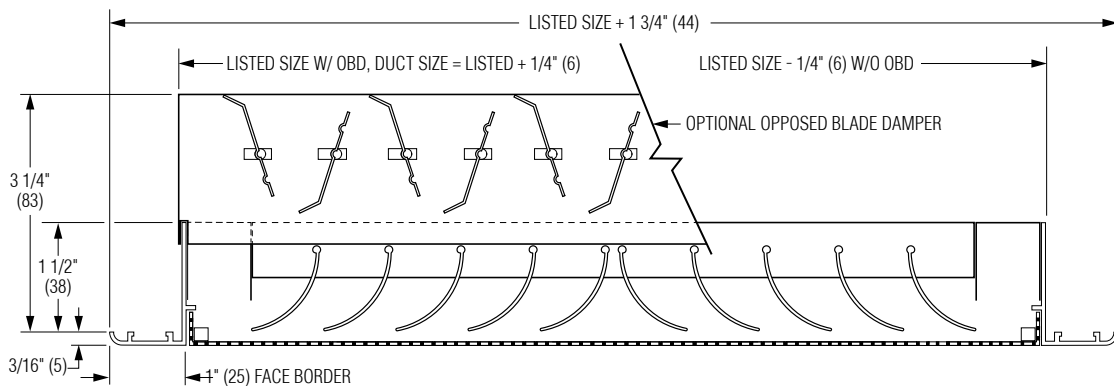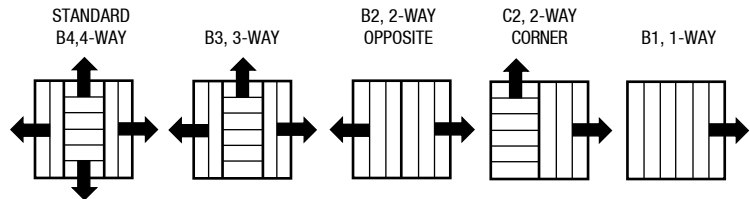

**DESCRIPTION:**

1. Material: Extruded aluminum blades and frame. Corrosion resistant steel perforated face.
2. Curved blades on 1" (25) centers are individually adjustable and regulate angle of discharge. Excellent performance in VAV systems. Frame is mechanically interlocked for strength with hairline mitered corners. Standard diffuser has a 4-way (B4) discharge pattern.
3. Minimum size 6" x 6" (152 x 152). Maximum size 24" x 24" (610 x 610). Available in 2" (51) increments.
4. Removable face has concealed latches for easy access to core.
5. Perforated face has 3/16" (5) diameter holes on 1/4" (6) staggered centers. (51% free area).
6. Type N standard fastening is with sheet metal screws (by others), through the neck of the diffuser outer frame.
7. Standard finish is AW Appliance White.

**OPTIONS:**

- Aluminum perforated face (Model 4340CBA).
- Finish:
- SP Special \_\_\_\_\_.
- Fastening:
- Type A Countersunk screwholes on face of outer frame.
- Blow Pattern:
- B3 3-way
- B2 2-way opposite
- C2 2-way corner
- B1 1-way
- Special Features \_\_\_\_\_.

**ACCESSORIES:**

- Steel opposed blade damper (Model 4340CB-O or 4340CBA-O).

**SCHEDULE TYPE:**

**PROJECT:**

**ENGINEER:**

**CONTRACTOR:**

Dimensions are in inches (mm).

**DATE**

**B SERIES**

**SUPERSEDES**

**DRAWING NO.**

8 - 30 - 19

4300

4 - 22 - 03

4340CB