




**AIR BALANCING DEVICES
 OPPOSED BLADE DAMPER • DUCT MOUNTED
 FOR SQUARE AND RECTANGULAR NECKS
 MODEL: OBD-A TYPE SL & PL**

TYPE SL Screwdriver Slot Face Operator (Standard)

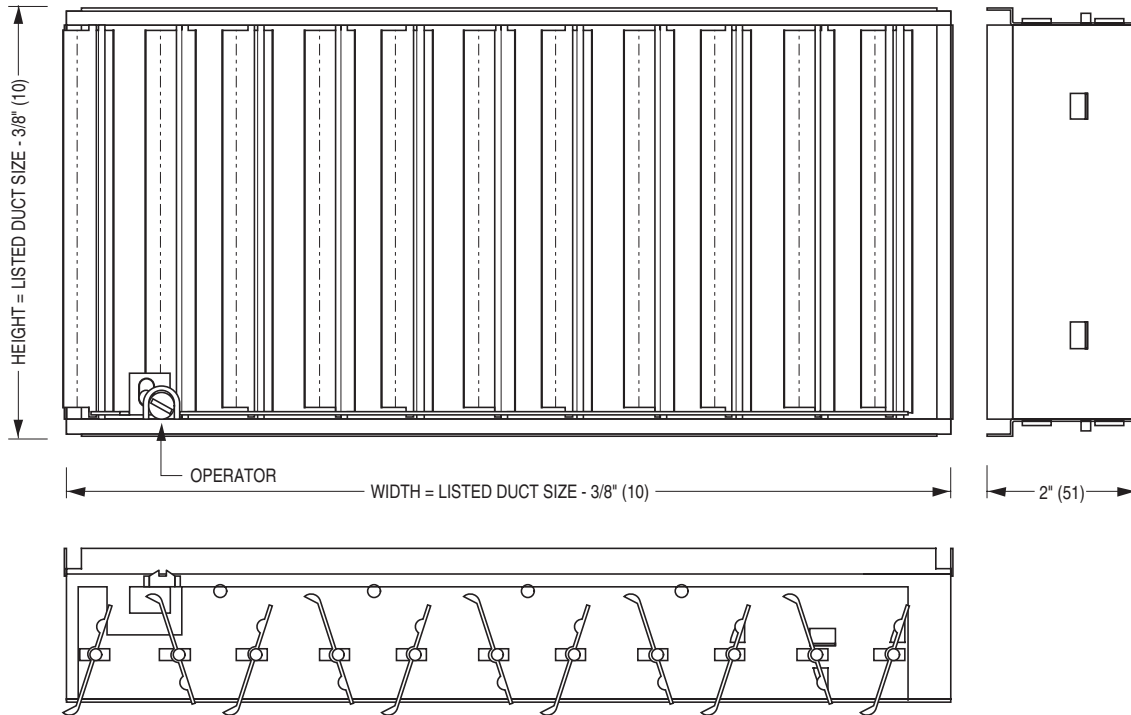

OBD-A-L Long Blades (parallel to long dimension)

OBD-A-S Short Blades (parallel to short dimension)

Minimum Size = 4" x 2 1/2" (102 x 64)

Maximum Size = 24" x 24" (610 x 610)

DESCRIPTION:


1. Material: Heavy gauge, extruded aluminum with miscellaneous steel components. Mill finish.
2. Designed to mount directly on the neck of a grille or diffuser in square and rectangular neck applications. Supplied with steel barbed S-clips for easy field mounting. Supplied as standard with a screwdriver slot operator.
3. Gang operated blades on 1" (25) centers move simultaneously in opposite directions and close at 45° to permit precise metering of the air with a minimal disturbance to the air pattern.

SPECIAL FEATURES:

_____.

OPTIONS:

Type PL Pivot Lever Operator.



For fixed, angled deflection return grilles. Blade orientation of damper must be opposite of grille. Adjusted with a screwdriver.

SCHEDULE TYPE:		Dimensions are in inches (mm).			
PROJECT:					
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.	
CONTRACTOR:	8 - 11 - 20	ACC.DIF/GR	26 - 8 - 99R	ACC.ABD-2	