



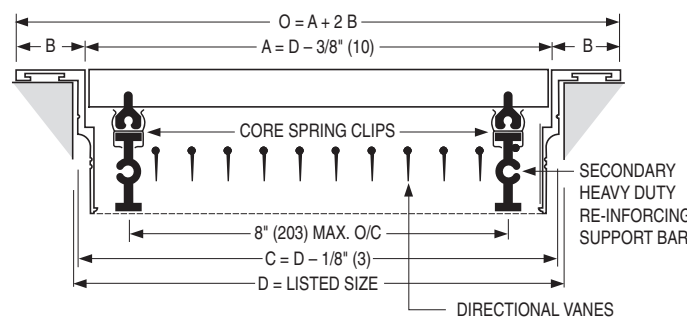


**DISPLACEMENT LINEAR FLOOR GRILLE**  
**SQUARE 1-WAY OR 2-WAY DISCHARGE**  
**ALUMINUM • REMOVABLE CORE**  
**MODEL: DLFG**

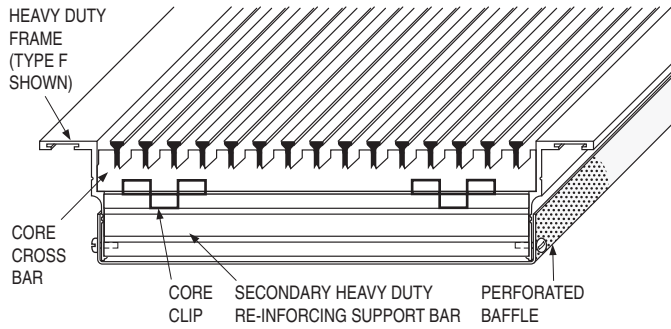


**Dimensional Data:**

<b>Model DLFG (W x H):</b>
10 1/2 x 10 1/2 (267 x 267) only

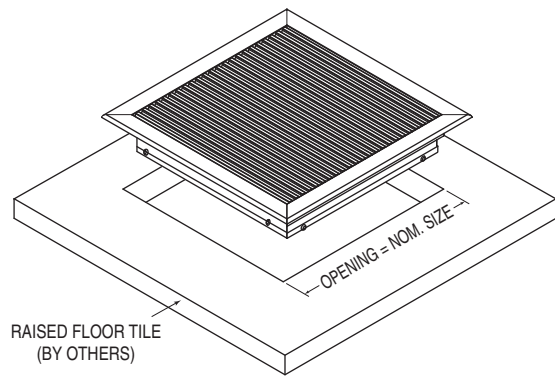


**Core Selection:**

- 243**
- 1/2" (13) Spacing
- 1/4" (6) Bars
- 30° Deflection




- 243T**
- 1/2" (13) Spacing
- 1/4" (6) Bars
- 30° Deflection
- 2-Way Discharge




**Frame Selection:**

- F (Standard)**  
1" (25) Border Flange
- H (Optional)**  
3/4" (19) Beveled Border Flange

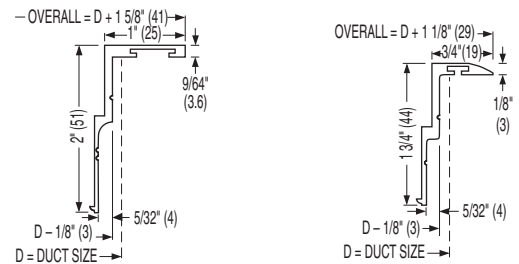

**Fastening Selection:**

- B (Standard)**  
Spring Clip  
(Frames F or H)
- A (Optional)**  
#8 Countersunk Screw Holes  
(Frame F only)

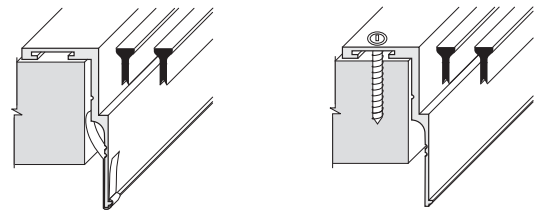

**DESCRIPTION:**

1. Material: Heavy duty aluminum construction.
2. Designed for raised floor installations. Ideally suited for localized low air volume cooling and ventilation requirements when integrated with an underfloor air distribution (UFAD) system.
3. Heavy duty linear bar face with integral perforated equalization baffle available in a 1-way or 2-way discharge air pattern ensures an even distribution of low velocity supply air along the floor with minimal turbulence or induction room air.
4. Mitered corners are staked and welded.
5. Heavy duty core is removable, supplied with core spring clips as standard and reinforced with additional cross-bar support.
6. Adjustable DV Directional Vanes.
7. Finish:
  - AW Appliance White (standard)
  - GRT Gray Textured
  - BKT Black Textured
  - SP Special (custom color by architect)

**SCHEDULE TYPE:**

**PROJECT:**

**ENGINEER:**

**CONTRACTOR:**

Dimensions are in inches (mm).

<b>DATE</b>	<b>B SERIES</b>	<b>SUPERSEDES</b>	<b>DRAWING NO.</b>
1 - 18 - 18	DLF	NEW	DLFG