


Model 41VC Concealed & 41VX/41VS Exposed Cabinet Proportional ECM Fan Performance Curves • Airflow vs. External Static Pressure

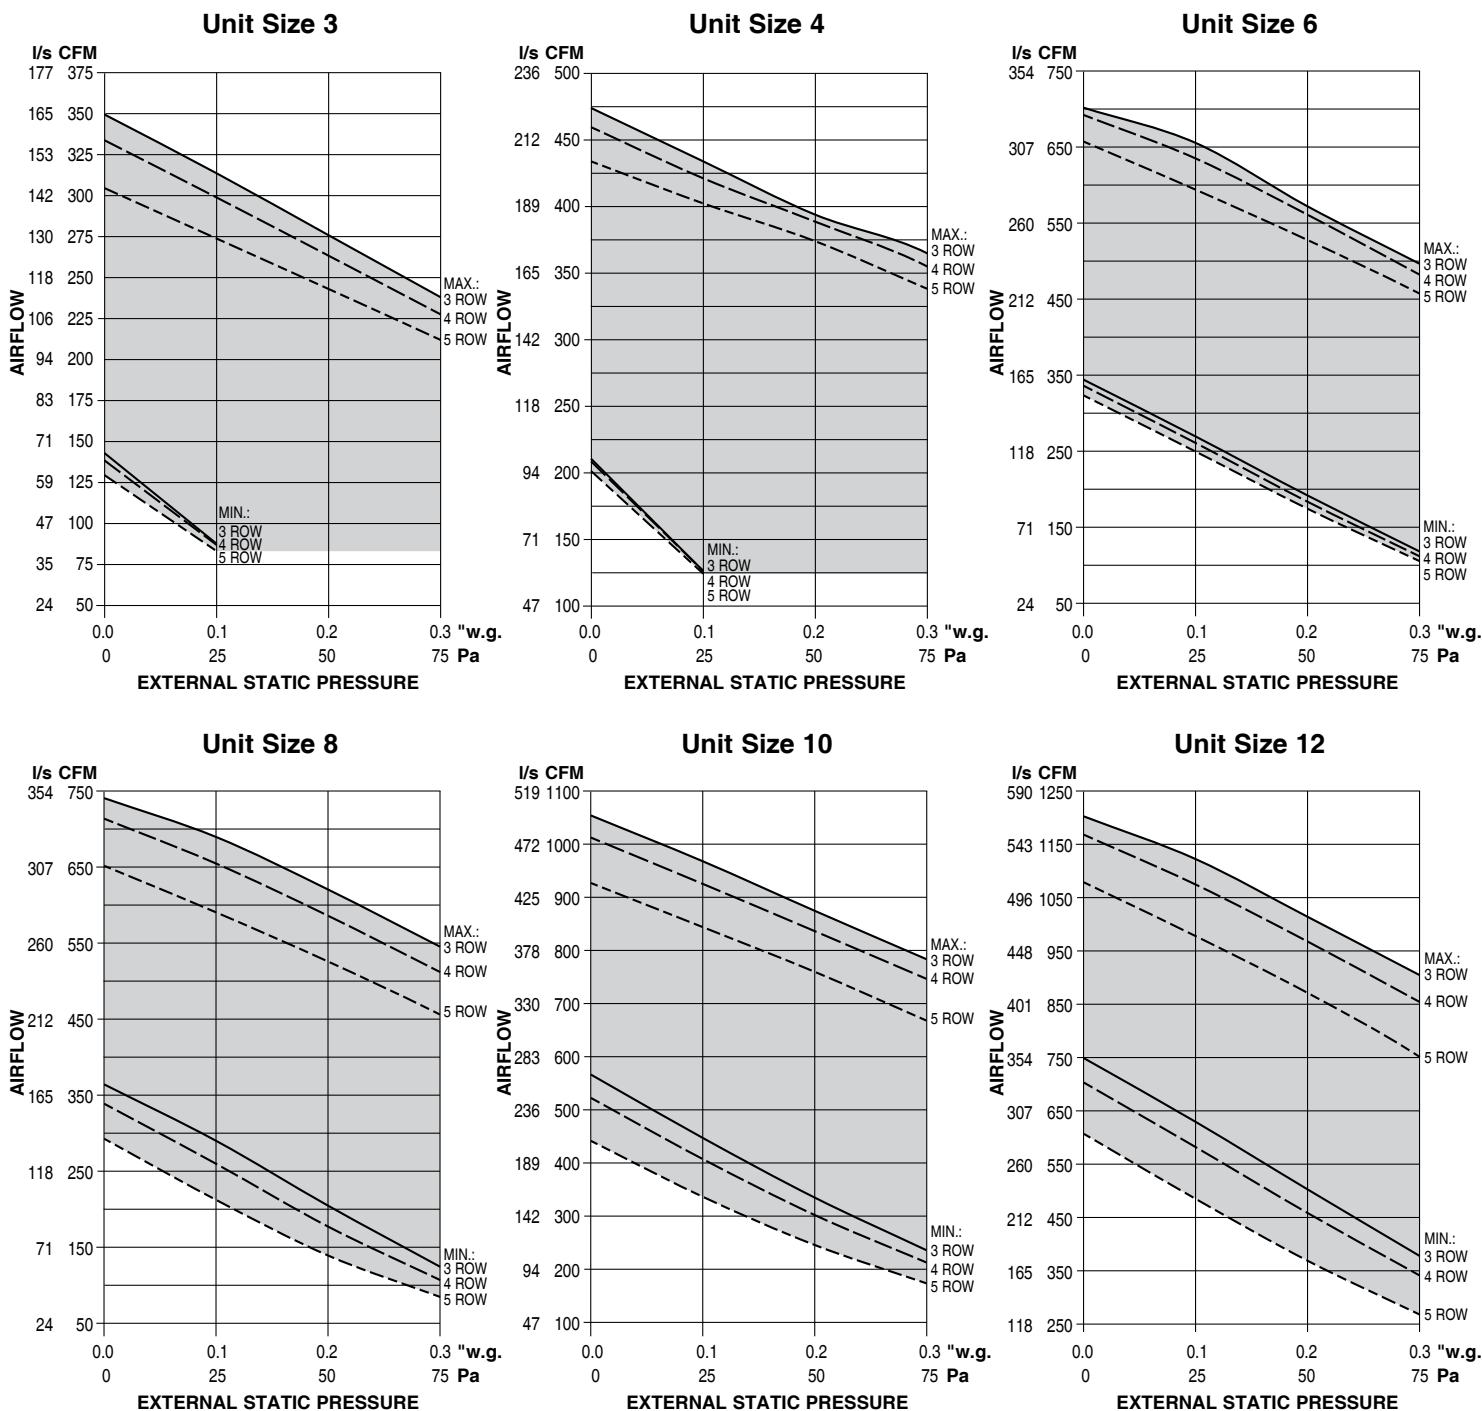

Proportional ECM Motor Fan Notes:

1. Airflow can be set to operate at any point within shaded area under the selected water coil curve using the ECM Fan Card volume controller provided.
2. Fan curves shown are applicable to 120/208/240 and 277 volt, single phase Proportional ECM (motors).
3. The maximum curve represents unit performance with a 3-row coil. For one (1) or two (2) row hot water coils [41V Series with (W) heating unit] performance will be slightly better. See SelectWorks for performance data Characteristics.
4. Filter pressure drops table shown on page D13.