

HEAVY DUTY STAINLESS STEEL

This grille is used mainly for return air applications that require strength and durability in corrosive or high humidity environments. The frame is welded and the blades are spaced on 1/2" (13) centers and reinforced with a mullion on 8" (203) centers.

Stainless Steel – Models 6755H-HD, 6755V-HD **Page F159**
 Suffix '-O' adds a stainless steel OBD



Model 6755H-HD



Models 45DL1, 45DL2

DRUM LOUVERS

These extruded aluminum drum louvers are appropriate when high volumes of air are used and in spot heating and cooling applications. A split-vane style and a pole operating bracket are available.

Models 45DLC1, 45DLC2 **Page F168**
 Suffix '-DEX' adds a damper/extractor (air scoop)

Models 45DL1, 45DL2 **Page F170**
 Suffix '-O' adds a steel OBD

INDUSTRIAL SUPPLY

The industrial supply grilles and registers have contoured airfoil blades that are extruded aluminum and are available with either 1 1/2" (38) or 3" (76) blade spacing. The heavy gauge, 1 1/4" (32) frame includes reinforced and staked mitered corners.


• **Double Deflection**
1 1/2" (38) Blade Spacing – Models 81DV, 81DH **Page F177**

3" (76) Blade Spacing – Models 813DV, 813DH **Page F177**
 Suffix '-O' adds a steel OBD

• **Single Deflection**
1 1/2" (38) Blade Spacing – Models 81SV, 81SH **Page F177**

3" (76) Blade Spacing – Models 813SV, 813SH **Page F177**
 Suffix '-O' adds a steel OBD

• **Gang Operated – Models 81GDV, 81GDH** **Page F177**
 Suffix '-O' adds a steel OBD

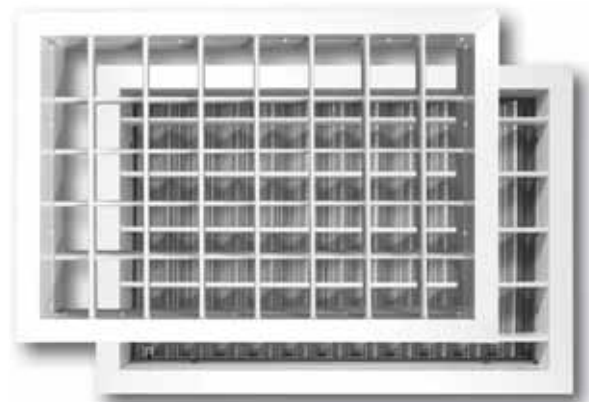

Models 813SH-O, 813DV



Model 81MG3

MODULAR CORE - INDUSTRIAL SUPPLY

Nailor has incorporated the features of the 8100 Series (double deflection) industrial supply grilles with an aluminum modular frame, which allows for extra directional flow flexibility. Up to four modules are available in specific sizes from 8" x 8" to 15" x 15" (203 x 203 to 381 x 381).

Models 81MG1, 81MG2, 81MG3, 81MG4 **Page F184**

Suffix '-O' adds a steel OBD


LATTICE FACE

Lattice face grilles are available in heavy gauge aluminum, steel and stainless steel construction with a selection of hole patterns to choose from. Countersunk screw holes and mounting screws are optional.

Aluminum – Model 51LG **Page F189**

Steel – Model 61LG **Page F189**

Stainless Steel – Model 67LG **Page F189**

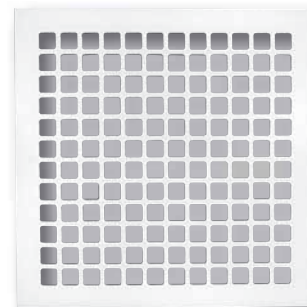

Model 61LG75

STAINLESS STEEL HEAVY DUTY RETURN GRILLES AND REGISTERS

- FIXED 45° BLADE
- 1/2" (13) SPACING

Models:

6755H-HD 45° Deflection Horizontal Blades

6755V-HD 45° Deflection Vertical Blades

- Suffix '-O' adds a stainless steel opposed blade damper



Model 6755H-HD

Models 6755H-HD and 6755V-HD Heavy Duty Return Grilles and Registers have fixed horizontal and vertical blades respectively, spaced on 1/2" (13) centers with a 45° fixed deflection.

The streamlined blades and open spacing maintain a minimum effective free area of 40%, which minimizes intake velocity, reduces inlet pressure and provides quiet operation. The smooth blade shapes do not accumulate lint and plug up.

The 1/2" (13) blade centers on these models provide a return grille for return air or exhaust applications which has a 'no see-through' design, not only when the grille is viewed with the blade deflection facing away from the line of sight, but also when viewed from straight ahead.

Stainless steel grilles and registers are well suited for applications involving corrosive environments, high humidity or frequent cleaning with strong chemicals. Typical projects include hospitals, clean rooms, laboratories, industrial and manufacturing facilities.

STANDARD FEATURES:

- 1 3/8" (35) wide face border with a 1" (25) overlap margin standard, furnished with Type A countersunk screw holes and stainless steel mounting screws.
- Rigid, welded and reinforced frames with hairline mitered corners.
- Streamlined airfoil shaped roll-formed blades on 1/2" (13) centers. Blades positively hold deflection setting under all conditions of velocity and pressure.

- Blades are reinforced by an additional support mullion on maximum 8" (203) centers.

- Available in sizes from 4" x 4" to 60" x 48" (102 x 102 to 1524 x 1219).

CONSTRUCTION MATERIAL:



- Type 304 stainless steel construction.
- Integral dampers - roll-formed stainless steel blades. Opposed blade design with a screwdriver operator.

FINISH OPTIONS:

- #4 Brushed Satin Polished Finish is standard. AW Appliance White finish is optional. Other finishes are available.

OPTIONS AND ACCESSORIES:

- 316 Type 316 stainless steel construction available as an option.
 - PFS Stainless Steel Plaster Frame
- For additional options and accessories, see page F191.

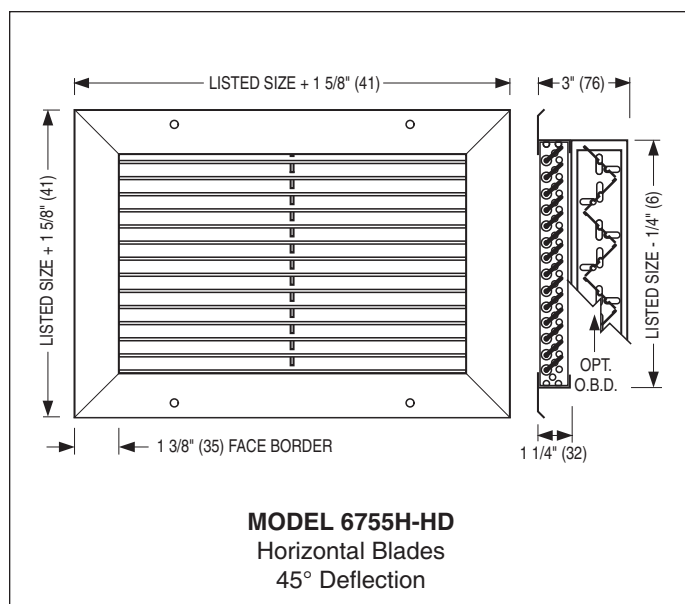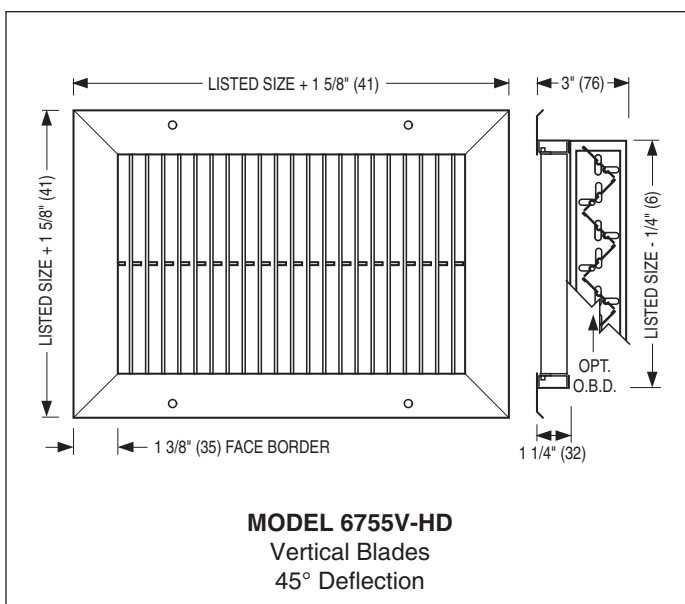

PERFORMANCE DATA:

STAINLESS STEEL HEAVY DUTY RETURN GRILLES AND REGISTERS • 45° DEFLECTION

MODELS: 6755H-HD, 6755V-HD

Listed Duct Size (inches)	Alternate Sizes (inches)	Core Area (sq. ft.)	Ak Factor	Core Velocity Velocity Pressure Neg. Static Pressure	100	200	300	400	500	600	700	800	900	1000
					.001 .005	.002 .021	.006 .046	.010 .082	.016 .129	.022 .185	.031 .252	.040 .330	.050 .417	.062 .515
6 x 6	8 x 4 10 x 4	0.20	0.23	CFM Noise Criteria	20 -	40 -	60 -	80 -	100 17	120 22	140 27	160 31	180 35	200 39
8 x 6	10 x 5 12 x 4	0.28	0.30	CFM Noise Criteria	28 -	56 -	84 -	112 -	140 18	168 23	196 28	224 32	252 36	280 40
10 x 6	12 x 5 16 x 4	0.35	0.37	CFM Noise Criteria	35 -	70 -	105 -	140 -	175 19	210 24	245 29	280 33	315 37	350 41
8 x 8	14 x 5	0.38	0.40	CFM Noise Criteria	38 -	76 -	114 -	152 15	190 20	228 25	266 30	304 34	342 38	380 42
12 x 6	18 x 4	0.42	0.45	CFM Noise Criteria	42 -	84 -	126 -	168 16	210 21	252 26	294 30	336 35	378 39	420 43
12 x 8	16 x 6 24 x 4	0.58	0.59	CFM Noise Criteria	58 -	116 -	174 -	232 17	290 22	348 27	406 31	464 36	522 40	580 44
10 x 10	14 x 7 26 x 4	0.61	0.62	CFM Noise Criteria	61 -	122 -	183 -	244 17	305 22	366 27	427 32	488 37	549 40	610 44
18 x 6	14 x 8 30 x 4 28 x 4	0.65	0.67	CFM Noise Criteria	65 -	130 -	195 -	260 18	325 23	390 28	455 33	520 37	585 41	650 44
12 x 10	16 x 8 20 x 6 24 x 5	0.74	0.74	CFM Noise Criteria	74 -	148 -	222 -	296 18	370 23	444 28	518 33	592 38	666 42	740 45
12 x 12	14 x 10 24 x 6 18 x 8 38 x 4	0.90	0.89	CFM Noise Criteria	90 -	180 -	270 -	360 19	450 24	540 29	630 34	720 39	810 42	900 45
14 x 14	16 x 12 24 x 8 20 x 10 34 x 6	1.24	1.22	CFM Noise Criteria	124 -	248 -	372 -	496 19	620 24	744 29	868 34	992 39	1116 43	1240 46
18 x 12	16 x 14 28 x 8 22 x 10 38 x 6	1.37	1.34	CFM Noise Criteria	137 -	274 -	411 16	548 21	685 26	822 31	959 36	1096 41	1233 44	1370 47
24 x 10	20 x 12 30 x 8	1.52	1.49	CFM Noise Criteria	152 -	304 -	456 16	608 21	760 26	912 31	1064 36	1216 42	1368 45	1520 48
16 x 16	18 x 14 30 x 8 22 x 12	1.64	1.58	CFM Noise Criteria	164 -	328 -	492 17	656 22	820 27	984 32	1148 37	1312 42	1476 45	1640 48
24 x 12	18 x 16 30 x 10 20 x 14 36 x 8	1.85	1.78	CFM Noise Criteria	185 -	370 -	555 17	740 22	925 27	1110 32	1295 37	1480 42	1665 45	1850 49
18 x 18	20 x 16 28 x 12 24 x 14 32 x 10	2.10	2.01	CFM Noise Criteria	210 -	420 -	630 17	840 22	1050 27	1260 33	1470 38	1680 43	1890 46	2100 49
30 x 12	20 x 18 26 x 14 22 x 16 36 x 10	2.32	2.23	CFM Noise Criteria	232 -	464 -	696 17	928 23	1160 28	1392 33	1624 38	1856 43	2088 46	2320 50
20 x 20	24 x 18 30 x 14 26 x 16 36 x 12	2.61	2.48	CFM Noise Criteria	261 -	522 -	783 17	1044 23	1305 28	1566 34	1827 39	2088 44	2349 47	2610 50
22 x 22	24 x 20 30 x 16 26 x 18 36 x 14	3.17	3.00	CFM Noise Criteria	317 -	634 -	951 18	1268 24	1585 29	1902 35	2219 39	2536 44	2853 47	3170 51
30 x 18	24 x 22 40 x 14 34 x 16	3.54	3.34	CFM Noise Criteria	354 -	708 -	1062 18	1416 24	1770 29	2124 35	2478 40	2832 45	3186 48	3540 52
24 x 24	26 x 22 32 x 18 28 x 20 36 x 16	3.79	3.56	CFM Noise Criteria	379 -	758 -	1137 18	1516 24	1895 29	2274 35	2653 40	3032 45	3411 48	3790 52
36 x 18	32 x 20 46 x 14 40 x 16	4.27	4.01	CFM Noise Criteria	427 -	854 -	1281 19	1708 26	2135 30	2562 37	2989 42	3416 47	3843 50	4270 54
26 x 26	28 x 24 48 x 14	4.47	4.19	CFM Noise Criteria	447 -	894 -	1341 19	1788 26	2235 31	2682 37	3129 42	3576 47	4023 50	4470 54
30 x 24	28 x 26 36 x 20 32 x 22 40 x 18	4.77	4.46	CFM Noise Criteria	477 -	954 -	1431 20	1908 27	2385 32	2862 38	3339 43	3816 47	4293 51	4770 55
28 x 28	30 x 26 40 x 20 36 x 22	5.20	4.85	CFM Noise Criteria	520 -	1040 -	1560 20	2080 27	2600 32	3120 38	3640 43	4160 48	4680 51	5200 55
36 x 24	30 x 28 44 x 20 40 x 22	5.74	5.35	CFM Noise Criteria	574 -	1148 -	1722 20	2296 27	2870 33	3444 39	4018 43	4592 48	5166 52	5740 56
30 x 30	34 x 26 48 x 20 38 x 24	5.99	5.57	CFM Noise Criteria	599 -	1198 -	1797 20	2396 27	2995 33	3594 39	4193 44	4792 48	5391 52	5990 56

For performance data notes, see F165.

PERFORMANCE DATA:

STAINLESS STEEL HEAVY DUTY RETURN GRILLES AND REGISTERS • 45° DEFLECTION

MODELS: 6755H-HD, 6755V-HD

Listed Duct Size (inches)	Alternate Sizes (inches)	Core Area (sq. ft.)	Ak Factor	Core Velocity	Velocity Pressure	100	200	300	400	500	600	700	800	900	1000
						Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure	Neg. Static Pressure
32 x 32	36 x 30 46 x 22 38 x 28	6.84	6.34	CFM	Noise Criteria	684	1368	2052	2736	3420	4104	4788	5472	6156	6840
						-	16	21	28	34	40	44	49	53	57
48 x 24	34 x 34 38 x 30 36 x 32 48 x 28	7.69	7.13	CFM	Noise Criteria	769	1538	2307	3076	3845	4614	5383	6152	6921	7690
						-	17	22	28	34	40	45	49	53	57
36 x 36	38 x 34 46 x 28 42 x 30 48 x 26	8.69	8.02	CFM	Noise Criteria	869	1738	2607	3476	4345	5214	6083	6952	7821	8690
						-	18	22	29	34	41	46	50	54	58
38 x 38	42 x 34 48 x 30 44 x 34	9.70	8.94	CFM	Noise Criteria	970	1940	2910	3880	4850	5820	6790	7760	8730	9700
						-	19	23	29	35	41	46	50	54	58
40 x 40	42 x 36 48 x 32 46 x 34	10.77	9.90	CFM	Noise Criteria	1077	2154	3231	4308	5385	6462	7539	8616	9693	10770
						-	19	24	30	36	42	48	51	56	60
42 x 42	44 x 40 48 x 36 46 x 38	11.89	10.92	CFM	Noise Criteria	1189	2378	3567	4756	5945	7134	8323	9512	10701	11890
						15	20	25	31	37	43	48	52	56	60
44 x 44	46 x 42	13.07	11.98	CFM	Noise Criteria	1307	2614	3921	5228	6535	7842	9149	10456	11763	13070
						15	20	25	31	37	43	48	52	56	60
46 x 46		14.30	13.10	CFM	Noise Criteria	1430	2860	4290	5720	7150	8580	10010	11440	12870	14300
						16	21	26	32	38	44	49	53	57	61
48 x 48		15.59	14.26	CFM	Noise Criteria	1559	3118	4677	6236	7795	9354	10913	12472	14031	15590
						16	21	26	32	38	44	49	53	57	61

Performance Notes:


1. All pressures are in inches w.g..
2. Core Velocity is in feet per minute.
3. Performance data is for grille with opposed blade damper. Apply the following correction factors for grille without damper.

Neg. Static Pressure Listed Value x 0.91.

Noise Criteria Listed value - 4.

4. Noise Criteria (NC) values are based upon 10dB room absorption, re 10⁻¹² watts. Dash (-) in space indicates an Noise Criteria of less than 15.

5. Data derived from tests conducted in accordance with ANSI/ASHRAE Standard 70 - 2006.

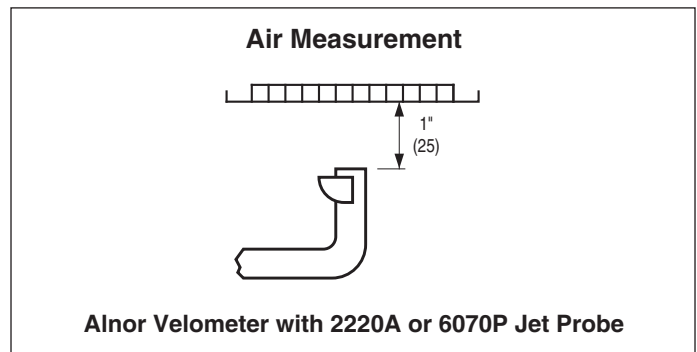

Airflow Measurements

1. Balancing factors are applicable with or without dampers, providing uniform airflow exists into grille or register.
 2. Take velocity readings at a number of locations on the inlet face (a minimum of 4), while positioning probe as shown above, one inch out from the face.
 3. Total the various velocity readings and divide by the number of readings taken to arrive at an average inlet velocity (Vk in FPM).
 4. Calculate the airflow (CFM) by multiplying the average velocity by the appropriate Ak factor.
- Airflow (CFM) = Average velocity (Vk) x Ak.

HOW TO ORDER

MODEL SERIES: 6700-HD

STAINLESS STEEL HEAVY DUTY RETURN GRILLES AND REGISTERS

EXAMPLE: 6755H-HD - O - 12 x 12 - S - #4 - A - 304 - PFS

- | | |
|--|---|
| <p>1. Models</p> <p>Horizontal/Long Dimension Blades:
6755H-HD 45° Deflection,
1/2 (13) Spacing</p> <p>Vertical/Short Dimension Blades:
6755V-HD 45° Deflection,
1/2 (13) Spacing</p> <p>2. Damper (OBD)
O Steel
— No Damper</p> <p>3. Nominal Width x Height
inches (mm)</p> <p>4. Frame/Border Type
S Surface Mount (default)</p> <p>5. Finish
#4 Brushed Satin Polished (default)
AW Appliance White
SP Special Custom Color</p> <p>6. Fastening
A Screw Holes (default)
N None</p> | <p>OPTIONS & ACCESSORIES:</p> <p>— None (default)</p> <p>7. Construction
304 Type 304 Stainless Steel (default)
316 Type 316 Stainless Steel</p> <p>8. Plaster Sub-Frame
PFS Stainless Steel Plaster Sub-Frame</p> |
|--|---|

- Notes:**
- For a standard grille with no special requirements, specification is only required as far as the damper selection. The "default" will automatically be selected. For example, a stainless steel 45° deflection register, horizontal blade direction and stainless steel damper, is Model 6755H-HD-O. Unit will be supplied with screw holes and #4 Brushed Satin Polished finish.
 - The larger dimension must always be specified first; for example, 24" x 12" (610 x 305), not 12" x 24" (305 x 610).
 - Refer to individual model submittal for guidance on availability of options and accessories.

GRILLES AND REGISTERS



HOW TO SPECIFY

MODEL SERIES: 6700-HD

STAINLESS STEEL HEAVY DUTY RETURN GRILLES AND REGISTERS

SUGGESTED SPECIFICATION:

Furnish and install **Nailor Model** (select one) **6755H-HD** or **6755V-HD Stainless Steel Heavy Duty Return Grilles** of the types and sizes as shown on the plans and air distribution schedules. The grilles shall be constructed entirely from 304 stainless steel (316 optional) with welded and reinforced frames. The blades shall be fixed at 45°, spaced on 1/2" (13) centers, and shall be reinforced by a support mullion on maximum 8" (203) centers. All exposed surfaces shall have a #4 Brushed Satin Polished finish (optional finish is AW Appliance White).

(Optional) A stainless steel opposed blade damper, adjustable from the face of the grille, shall be provided with all units.

The manufacturer shall provide published performance data for the grille, which shall be tested in accordance with ANSI/ASHRAE Standard 70 – 2006.

PRODUCT OVERVIEW OPTIONS AND ACCESSORIES FOR GRILLES AND REGISTERS

MOUNTING FRAMES

- Up to four methods of fastening available for most models.
- Sub-frame available for professionally finished openings.
- Surface mount adapter frame for plaster and sheet rock ceilings are available in steel and aluminum. They simplify installation, save time and allow ceiling plenum access.
- Panel mounting available to suit architectural ceiling systems.

OPTIONS

- A selection of optional items that are available on grilles and registers.
- Information on custom sizing for special applications.

FINISHES

- Selection of standard and non-standard finishes to choose from.
- Anodizing of aluminum products.

AIR BALANCING DEVICES


- Opposed blade dampers for every application.
- Volume extractors.

Effective air balancing of an HVAC System requires the correct selection, specification and installation of the right product to suit the system design.

Nailor offers a comprehensive range of models and options to cover all applications.

Nailor balancing devices are:

- Easy to select and specify. Many items can be supplied as factory mounted or packaged accessories on grilles and registers.
- Designed to offer a smooth, accurate and predictable response during adjustment for precise air metering.
- Designed to provide quick access and adjustment.
- Engineered with attention to optimizing airflow, in order to minimize noise, turbulence and pressure drop.

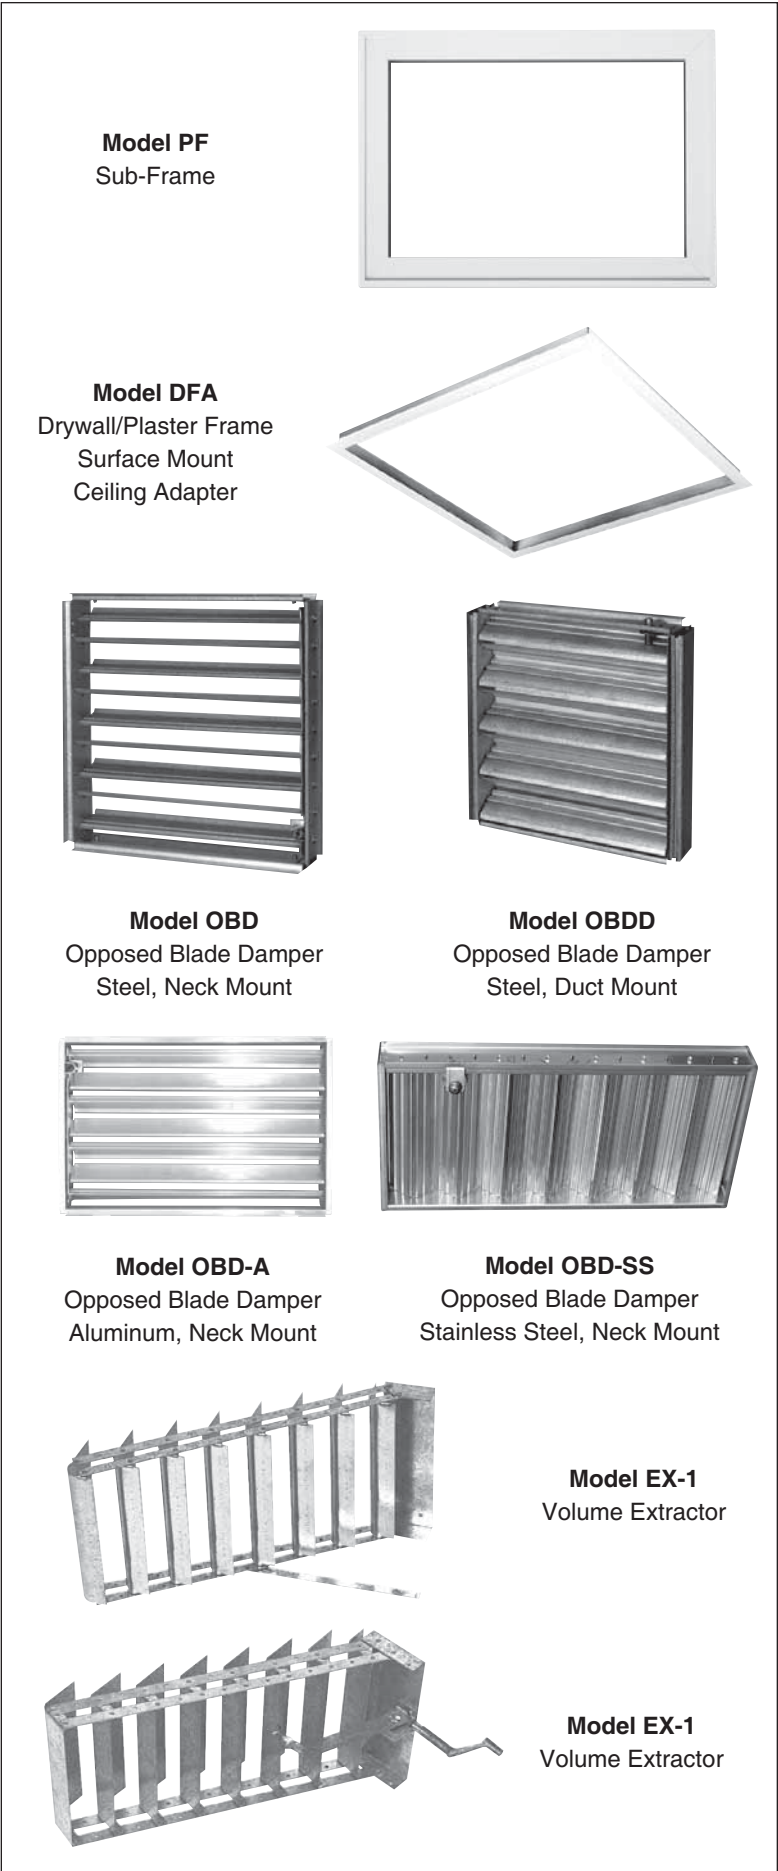


Fastening and Border Frames

Type A Screw Fastening (External)


Standard method of fastening for all Nailor grilles and registers in surface mount applications. All Nailor grilles and registers are supplied this way unless specified otherwise. Universal application for all models and cost effective installation.

Screw holes are countersunk in the frame for most models to provide an aesthetically pleasing appearance and are sized for #8 x 1 1/2" (38) oval-head screws which are supplied from the factory packed with each grille or register and are painted to match the specified finish.

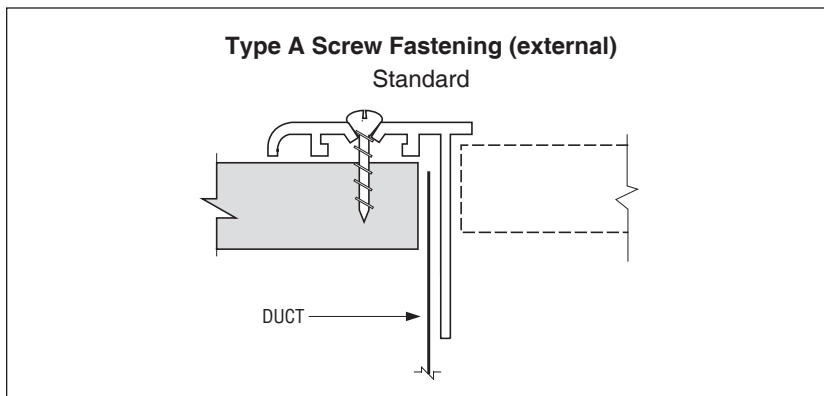


Type C Concealed Mounting

Grilles and registers are supplied with concealed mounting straps (at additional cost) which permit surface mounting with concealed screws, allowing a clean frame appearance. The bracket is shipped loose for installation in the field (by others). The bracket attaches to the back of the grille screws to an adjustable mounting strap which can either be secured directly to the duct wall or hooked into a hem formed in the end of the duct. Not available on return air grilles with 1/2" (13) spacing and a fixed angled blade deflection. Maximum size: 36" x 36" (914 x 914).

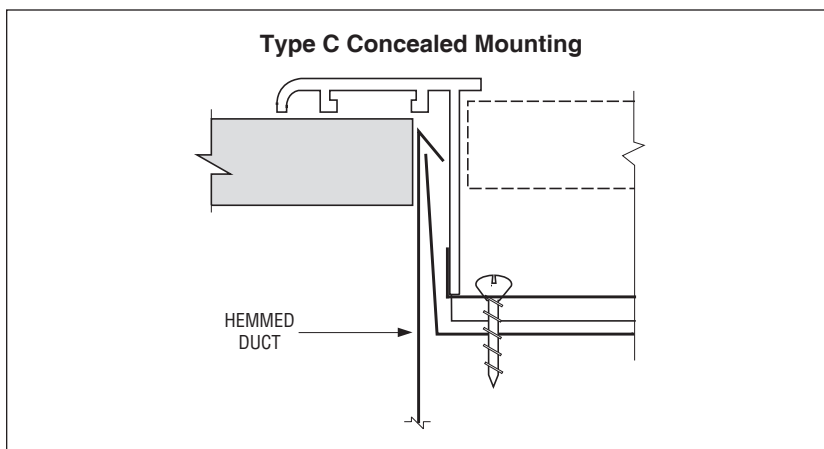

Type D Screw Fastening (Concealed)


Screw holes are provided in the neck of the grille or register frame. Screws are field installed at an angle through the grille frame and into the ductwork, providing a clean frame appearance. Installation is more difficult than Type A due to the space constriction between the grille blades. Care must be taken not to bend or scratch the grille. Not recommended on return air grilles with a fixed angled blade deflection as accessibility to screw holes is greatly restricted.

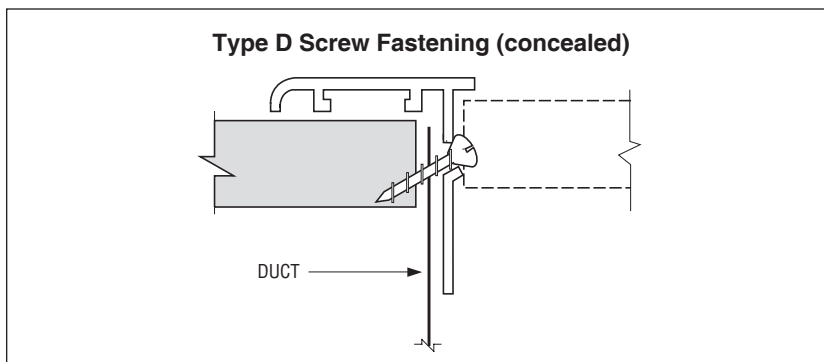

Type NF Narrow Frame

An optional reduced 1" (25) wide narrow border frame is available on most aluminum models to satisfy architectural considerations.


See individual models for availability.

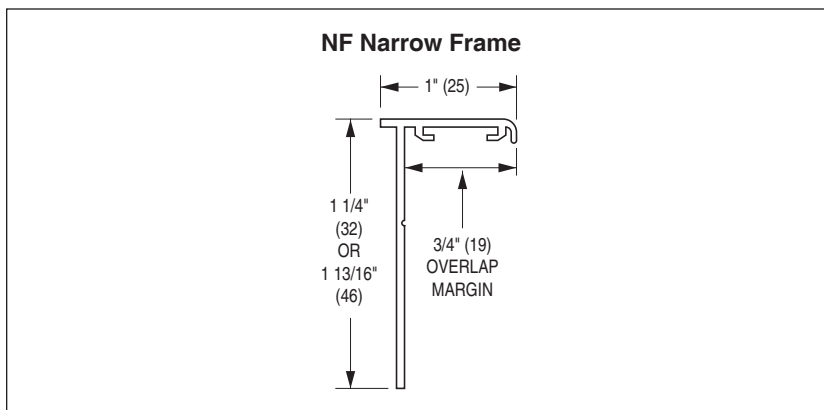

Mounting Frames

PF Plaster/Mounting Frame

Available (at additional cost) with most standard steel and aluminum grilles and registers. The Model PF Plaster Frame is constructed from extruded aluminum and provides a convenient and professional way for finishing off the grille or register opening. It provides a stable anchor for attachment, while enabling the grille or register to be detached and replaced readily without disturbing the finished surface of the wall or ceiling opening. It may be used for surface mounting on various materials or recess mounted in wet plaster.

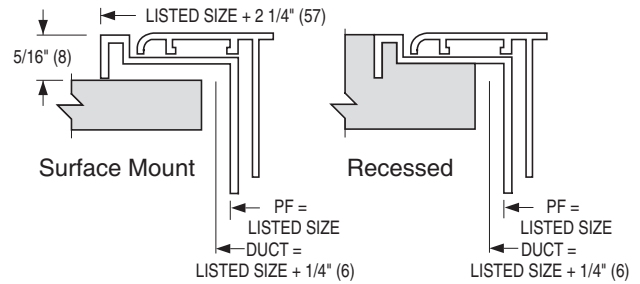

Model PF Plaster Frame

DFS (Steel), DFA (Aluminum) Drywall/Plaster Frame

The DF Series are for mounting in finished drywall or plaster ceilings to accept any standard lay-in type grille, register, diffuser or other ceiling component. Installation of the air outlet is as simple as inserting them in a standard lay-in T-Bar type ceiling system.


The DF Series simplifies and reduces installation time compared with surface mount type diffusers. This is especially true where flexible duct is utilized. A major benefit is that the DF Series allows access to the ceiling plenum space above for maintenance purposes without the need for separate access doors. The finished appearance is professional and aesthetically pleasing.

Standard Finish: AW Appliance White. Other finishes are available.

Model DFS is installed quickly and easily using adjustable fastening angle brackets which adapt to various ceiling thicknesses. Frames are roll-formed corrosion-resistant steel with staked and mitered corners.

IMPERIAL MODULES		METRIC MODULES
Imperial Units (inches)	S.I. Units (mm)	S.I. Units (mm)
12 x 12	305 x 305	300 x 300
16 x 16	406 x 406	400 x 400
20 x 20	508 x 508	500 x 500
24 x 12	610 x 305	600 x 300
24 x 24	610 x 610	600 x 600

Ceiling opening = CM + 1/4" (6)

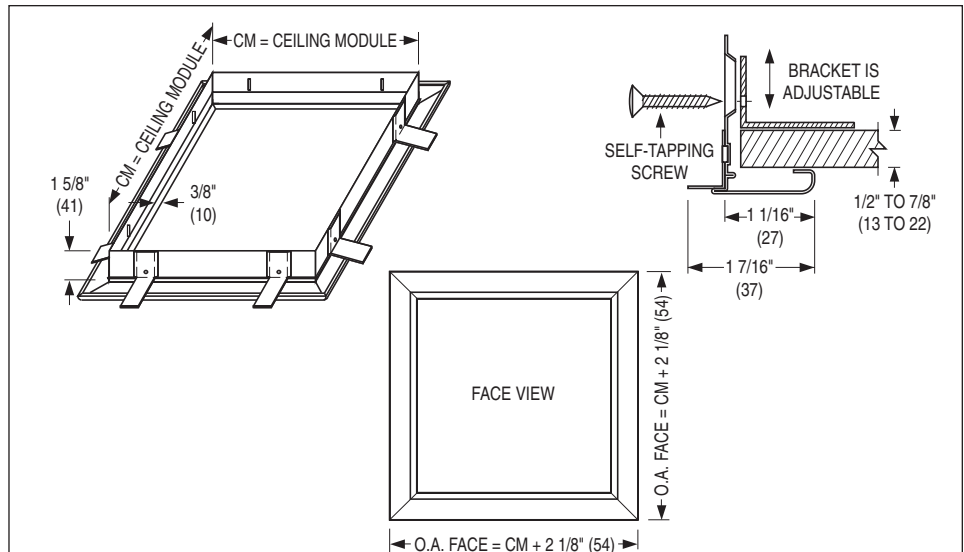


Model DFS

Model DFA requires framing of the ceiling opening with 'C' channel or wood studs for attachment with mounting screws (by others).

IMPERIAL MODULES		METRIC MODULES
Imperial Units (inches)	S.I. Units (mm)	S.I. Units (mm)
12 x 12	305 x 305	300 x 300
16 x 16	406 x 406	400 x 400
20 x 20	508 x 508	500 x 500
24 x 12	610 x 305	600 x 300
24 x 24	610 x 610	600 x 600
36 x 24	914 x 610	900 x 600
48 x 12	1219 x 305	1200 x 300
48 x 24	1219 x 1219	1200 x 600
60 x 12	1524 x 305	1500 x 300

Ceiling opening = CM + 1/4" (6)

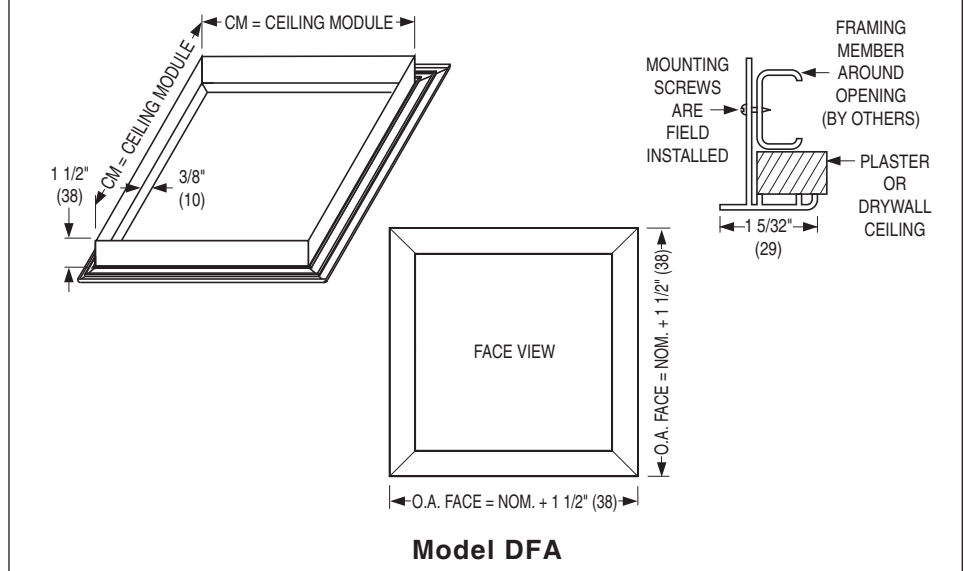

Model DFA

Panel Mounting/Ceiling Modules

A panel can be added to the majority of Nailor's steel and aluminum return grilles to suit many special architectural ceiling designs and ceiling module sizes. These panel mount grilles are available in corrosion-resistant steel for the 6100 series steel grilles and both aluminum and corrosion-resistant steel for the 5100 and 7100 series aluminum grilles.

To specify a steel panel; add the suffix S to the end of the selected panel variant. To specify an aluminum panel; add the suffix A to the end of the selected panel variant. e.g. If a steel panel is required with a Spline Type ceiling module, the variant code will become SPS.


The maximum grille neck sizes available for panel mounting will be the ceiling module size selected - 3" (76).

Available Ceiling Module Sizes

Ceiling Module	
Imperial Units (in.)	Metric Units (mm)
12 x 12	300 x 300
24 x 12	600 x 300
36 x 12	900 x 300
48 x 12	1200 x 300
20 x 20	500 x 500
24 x 24	600 x 600
36 x 24	900 x 600
48 x 24	1200 x 600


Border Type PL: Lay-in T-Bar

Grille or register is mounted in an extended panel to suit standard T-Bar Lay-in Type ceilings.

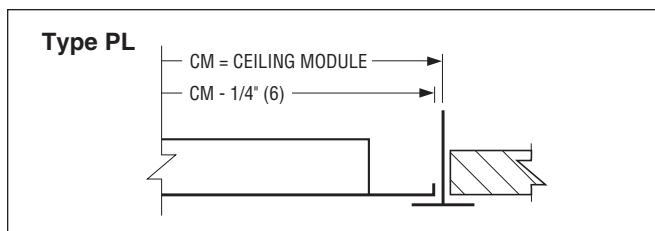


Border Type SP: Spline

The grille or register is mounted in an extended panel to suit spline type ceiling modules.

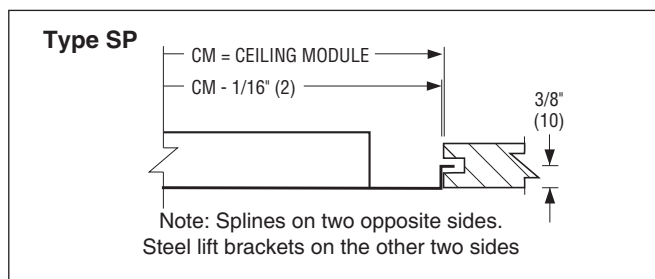


Border Type MP: Metal Pan/Snap-in

The grille or register is mounted in an extended panel to suit metal pan ceilings that have snap-in type ceiling modules.

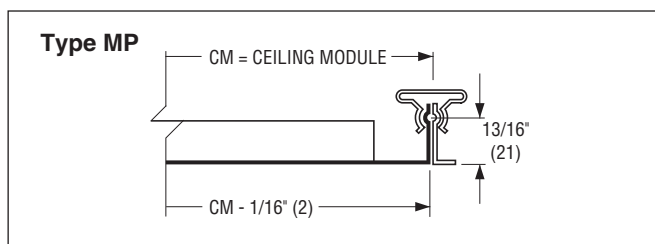


Border Type FP: Narrow Regressed T-Bar (Fineline®)

The grille or register is mounted in an extended panel that will fit a narrow regressed T-Bar ceiling grid.

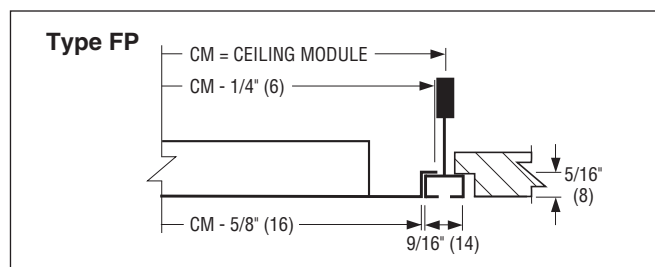

Border Type TL: Tegular Type T-Bar

The grille or register is mounted in a panel that will extend below the T-Bar ceiling grid.

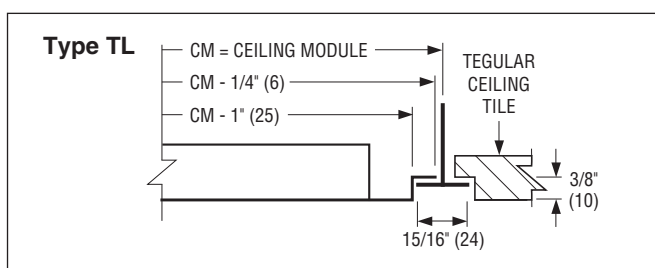

Options, Custom Sizing and Finishes

OPTIONS:

RACA Return Air Crosstalk Attenuator

Return Air Crosstalk Attenuator is designed to greatly reduce the amount of sound transferred from the return air plenum through open vents or return grilles, into the adjoining space.

EQT Earthquake Tabs

Earthquake (seismic) retaining safety tabs are available; factory installed on grilles or registers when required by local building code that units be independently restrained and safety wired to supporting structure.

GK Foam Gaskets

An optional foam gasket is available factory installed on the rear of all Type S corrosion-resistant steel and aluminum surface mount grilles and registers.

Eliminates air leakage and the possibility of dirt streaking and smudging from entrainment, particularly when installed on unevenly finished surfaces such as stucco.

IS Insect Screen

1/16" (2) galvanized steel mesh, factory installed.

CUSTOM SIZING:

Oversized Units

For specialized applications and architectural considerations; certain grilles and registers can be manufactured in single sections larger than the standard published maximum size at additional cost. Aspect ratio, tolerances, manufacturing capability and weight have all to be considered by the factory prior to acceptance. Consult your Nailor representative for specific applications.

Fractional/Hard Metric Sizes

Nailor grilles and registers have been designed and are manufactured to suit HVAC systems where the duct design has been done using Imperial Units of measurement (i.e. feet and inches). The majority of Nailor grilles and registers are fabricated as standard in 1" (25) nominal incremental units, giving the designer great flexibility during sizing selection.

At additional cost, the majority of Nailor grilles and registers can be custom fabricated in fractional sizes for special applications and in Hard Metric (S.I. Units) when the HVAC duct design has been done using the Metric System.

Consult your Nailor representative for availability on specific project applications.

FINISHES:

POWDER COAT

AW Appliance White (standard)

A white finish that is currently the industry standard. Closely matches standard finishes supplied by the majority of T-Bar ceiling system manufacturers. (No additional cost).

AL Aluminum

Contains suspended metal particles to give the appearance of a silver grey metallic or anodized finish. (No additional cost).

WH Off-White

Has a creamy appearance. (Additional cost)

BW British White

Matches most white ceiling tiles. (No additional cost)

LBP Light Bronze Paint

An economical alternative that closely matches industry standard anodizing in color, sheen and appearance. (Additional cost)

MBP Medium Bronze Paint

An economical alternative that closely matches industry standard anodizing in color, sheen and appearance. (Additional cost)

DBP Dark Bronze Paint

An economical alternative that closely matches industry standard anodizing in color, sheen and appearance. (Additional cost)

BK Black

This black has a matte finish. (Additional cost)

SP Special

The Nailor range of diffusers are available in any color for special architectural consideration. Custom colors are individually mixed to match customer supplied samples. (Additional cost)

ALUMINUM PRODUCT FINISHES:

SA Satin (Clear) Anodized

Adds a smooth satin finish to further protect the aluminum from corrosion (clear). (Additional cost)

STAINLESS STEEL PRODUCT FINISH ONLY:

#4 Brushed Satin Polished

Stainless Steel models only. (No additional cost)

ALSO AVAILABLE:

MI Mill Finish

(No additional cost).

PPA Paint Prepared Aluminum (Washed only)

(No additional cost).

PC Prime Coat Paint

Color will vary (Additional cost).

Sound Reduction for Return Air Grilles

RETURN AIR CROSSTALK ATTENUATOR – STEEL – RETURN AIR GRILLES




Nailor Model RACA Return Air Crosstalk Attenuator is designed to greatly reduce the amount of sound transferred from the return air plenum through open vents or return grilles, into the adjoining space. For use with non-ducted return grilles in Lay-in T-Bar applications, the RACA allows return air to flow through with minimal pressure drop, while reducing the sound transmission by 7 – 10 NC. Constructed of 22 gauge galvanized steel, the compact, light weight design takes up minimal space in the return plenum, rests on the ceiling grid for easy installation and works effectively as a light shield. Available with 1" (25) fiberglass insulation as standard or optional 1" (25) fiber-free closed cell foam insulation. The RACA fits standard grille sizes and is ideal for interior offices, conference rooms, hotel rooms as well as recording studios.

FEATURES:

- Economical and light- weight design.
- Fits standard grille sizes.
- Easy installation sits on ceiling grid.
- Compact design takes up minimal space in return plenum.
- 1" (25) fiberglass insulation (standard).

DIMENSIONAL DATA:

CM Ceiling Module	W	H	L
12" x 12" (305 x 305)	12" (305)	12" (305)	26 1/2" (673)
24" x 12" (610 x 305)	24" (610)	12" (305)	26 1/2" (673)
20" x 20" (508 x 508)	20" (508)	20" (508)	34 1/2" (876)
24" x 24" (610 x 610)	24" (610)	24" (610)	38 1/2" (978)
30" x 30" (762 x 762)	30" (762)	30" (762)	44 1/2" (1130)
48" x 24" (1219 x 610)	48" (1219)	24" (610)	38 1/2" (978)

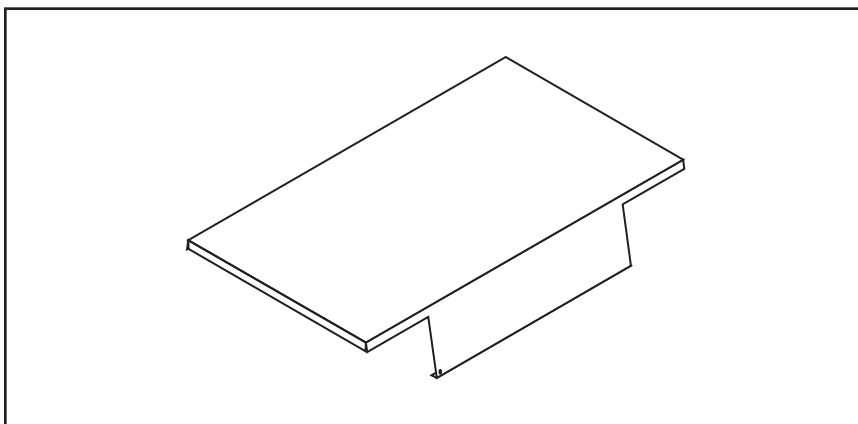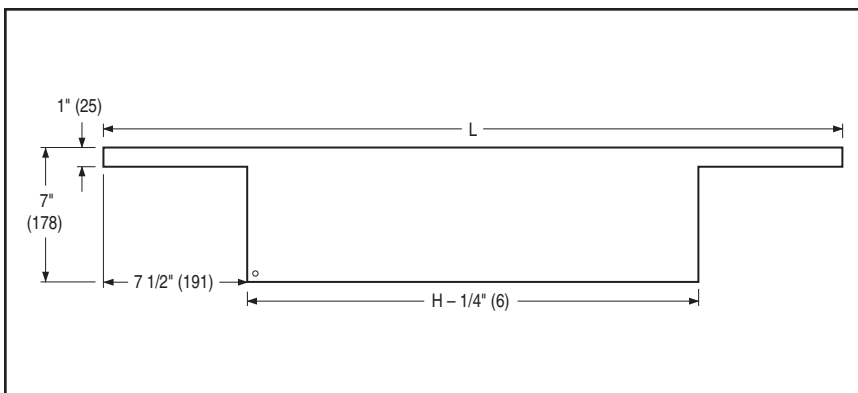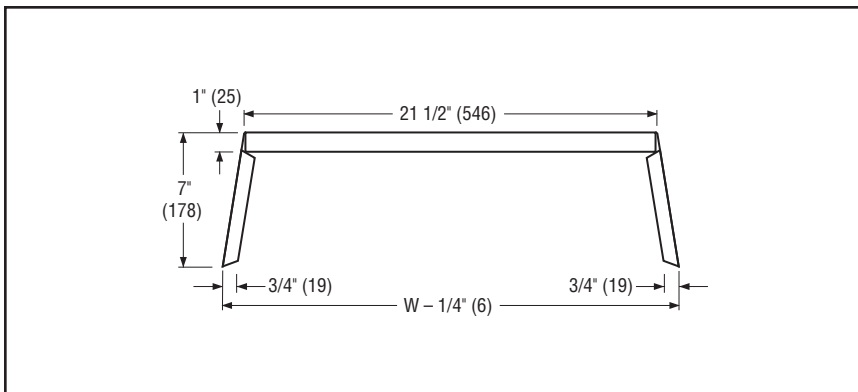

Air Balancing Devices

OPPOSED BLADE DAMPERS — STEEL AND ALUMINUM

Nailor Opposed Blade Dampers are manufactured from heavy gauge, roll-formed, corrosion-resistant steel or extruded aluminum blades and frame with miscellaneous steel components.

The gang operated multi-blade design with blades closing at 45 degrees permits fine volume control for accurate balancing with minimum disturbance to the airflow pattern. Blades are individually pivoted on 1" (25) centers.

GRILLE MOUNT MODELS:

OBD Steel

OBD-A Aluminum


This style of damper mounts directly on the neck of the grille and is sized to fit most Nailor grilles. Uses steel barbed S-clips for easy field mounting or removal when ordered separately. Supplied as standard with a screwdriver slot operator (Type SL) on supply registers and a screwdriver pivot lever operator (Type PL) on fixed, angled deflection return registers. Type SL operator is standard if damper is ordered separately from grille. A lever operator (Type GL) is available as an option on fixed, angled deflection return registers.

Can be specified as an integral part of the grille (register) by adding a - O (steel) or - OA (aluminum) suffix to the grille model.

Min. Size = 4" x 2 1/2" (102 x 64) Max. Size = 24" x 24" (610 x 610).


Type SL Operator

The SL Operator incorporates a screwdriver slot, which adjusts from the face of the register. This operator is the standard supplied with supply air registers such as the single and double deflection adjustable blade.

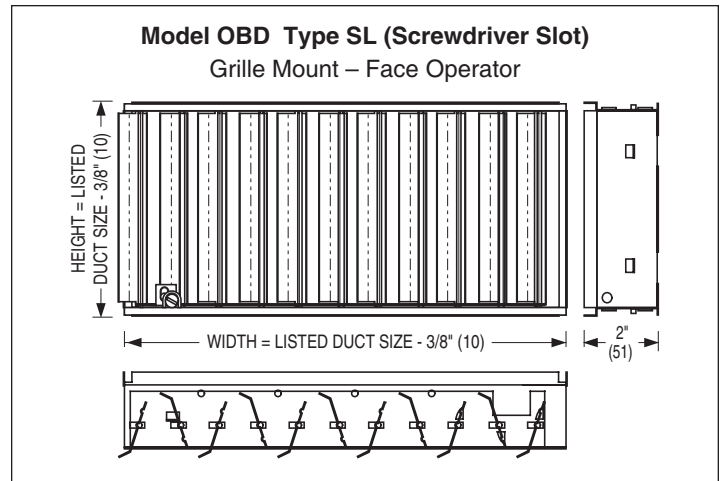


Type PL Operator

The PL Operator is a concealed pivot lever, which is adjusted from the face of the register using a screwdriver. This operator is for use only on fixed blade, angled deflection, return air grilles. When specifying, the blade orientation of the damper must be opposite of the grille.

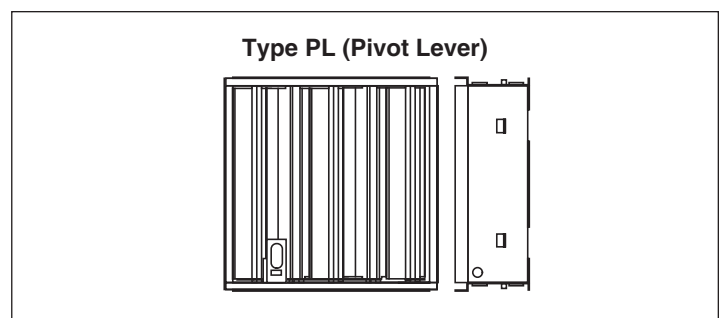

Type GL Operator

The GL Operator incorporates a lever that adjusts without the use of tools. The lever operator extends through the grille face and is an alternative for fixed blade, angled deflection, return air grilles. When specifying, the blade orientation of the damper must be opposite of the grille being used and the grille model must be specified.

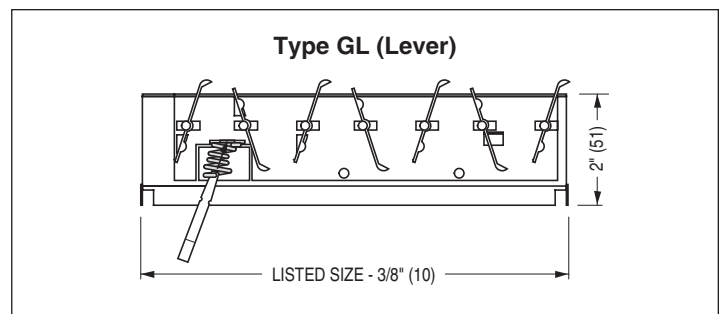

Air Balancing Devices

DUCT MOUNT MODELS:

OBDD Steel


OBDD-A Aluminum

Designed for field installation, this damper mounts independently in the duct, separate from and behind the grille. Sized to suit and offer a friction fit in nominally sized ducts. Secure the dampers with 1/2" (13) long sheet metal screws (by others) through the double walled sub-frame. Supplied as standard with a screwdriver slot operator (Type SL).

Min. Size = 4" x 2 1/2" (102 x 64) Max. Size = 24" x 24" (610 x 610)


Type SL Operator

These models are supplied with a screwdriver slot face operator that is accessed from inside the duct by removing the grille.

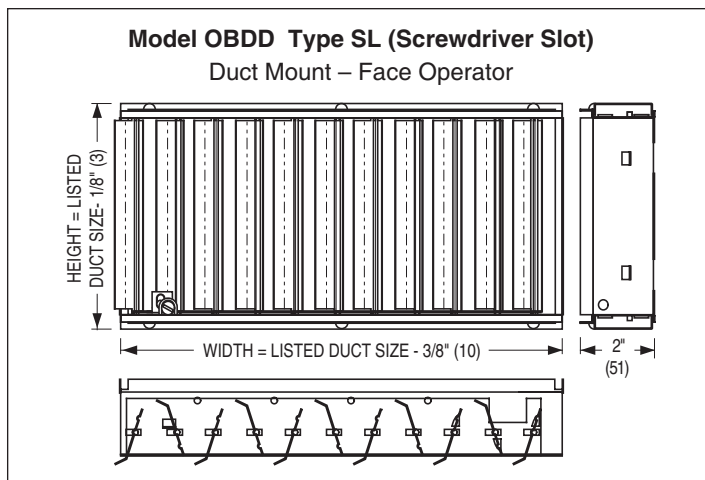


Type EH Operator

The EH Operator incorporates an external hex device that penetrates the duct wall to provide control. For use with 3/16" (5) Allen key wrench (by others).

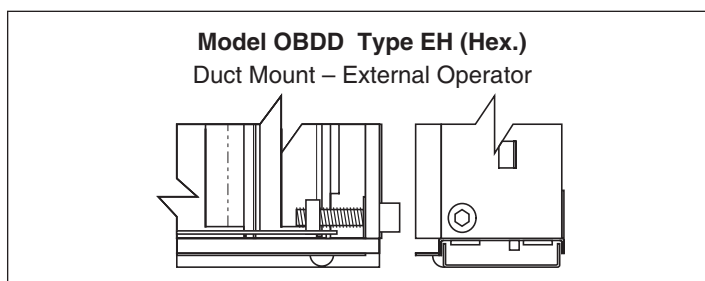

Type EN Operator

The EN Operator incorporates an external (nylon) screwdriver slot device. This device is controlled externally through the duct.

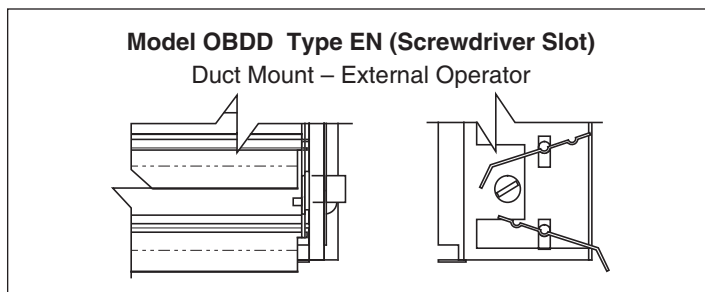


Type QD Operator *

The QD Operator includes a nylon snap-in extension that fits an external (nylon) operator. This device also includes a hand locking quadrant operator for control and position indication.

Type QX Operator *

The QX Operator includes a nylon snap-in extension that fits an external (nylon) operator. This device also includes a 2" (51) stand-off bracket and hand locking quadrant for control and position indication. To ensure quadrant is located on vertical side of duct, specify damper with blades parallel to the horizontal duct dimension.

*Not available on Model OBDD-A

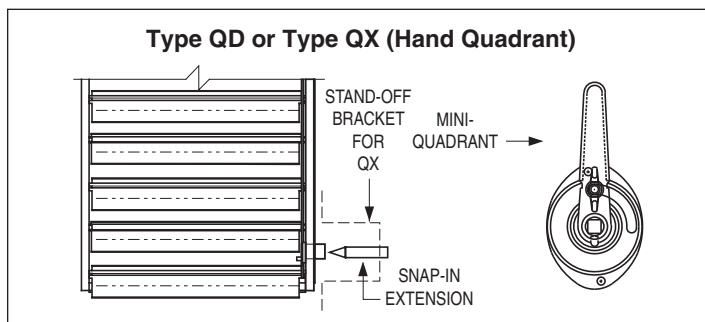

Air Balancing Devices

OPPOSED BLADE DAMPERS — STAINLESS STEEL

Nailor Stainless Steel Opposed Blade Dampers feature heavy gauge, roll-formed blades and a heavy duty frame in all stainless steel construction. Type 304 stainless steel is standard with Type 316 as an available option.


The gang operated multi-blade design with blades closing at 45 degrees permits fine volume control for accurate balancing with minimum disturbance to the airflow pattern. Blades are individually pivoted on 1" (25) centers.

GRILLE/DUCT MOUNT MODELS:

OBD-SS Stainless Steel

When ordered as part of the stainless steel grille, (using the suffix '-O' on the model number), the dampers are factory welded to the grille frame to provide a secure non-removable connection. If the dampers are ordered separately, they are supplied with mounting tabs. The tabs allow the dampers to be field installed onto a grille or to be mounted independently in the duct, separate from and behind the grille.

All Nailor stainless steel dampers feature a Philip's head screwdriver operator that is accessed through the face of the grille.

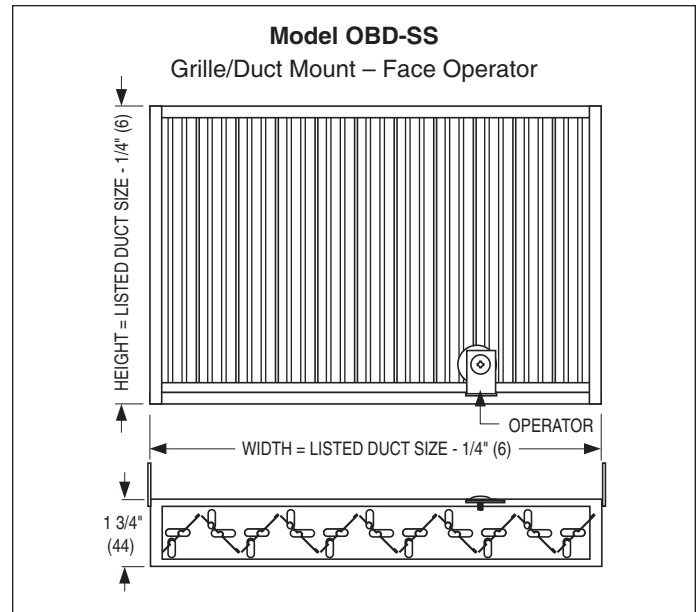

Volume Extractors

MODEL SERIES

EX Blades on 2" centers

EXD Blades on 1" centers

The **Model Series EX Volume Extractors** uniformly divert air from the main duct into the branch take-off and across the face of a grille or diffuser. Gang-operated parallel blades available on 2" (51) or 1" (25) centers pivot from full open to full closed with blades overlapping for shut-off. The curved blade design improves airflow by reducing turbulence, thereby reducing noise and pressure drop.

Specify or order: Length x Width. (Length is first dimension. Blades are parallel to width, second dimension).


FEATURES:

- Material: Galvanized steel.
- Minimum size: 6" x 4" (152 x 102).
- Maximum size: 36" x 36" (914 x 914).

Operator Types


EX/EXD-1

Standard unit with adjusting strap.




EX/EXD-1-R

Rod operator for external operation.

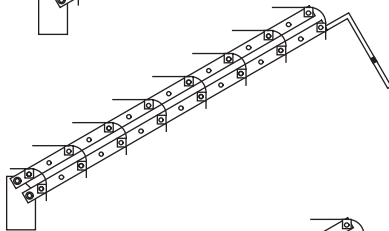



EX/EXD-2

Linkage with 7/16" (11) square hole (2 per unit). Remote operator (eg. Young Regulator #1) by others.

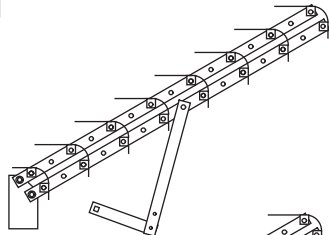

EX/EXD-3

Screw gear operator. Adjusts with 3/16" (48) wrench (by others).

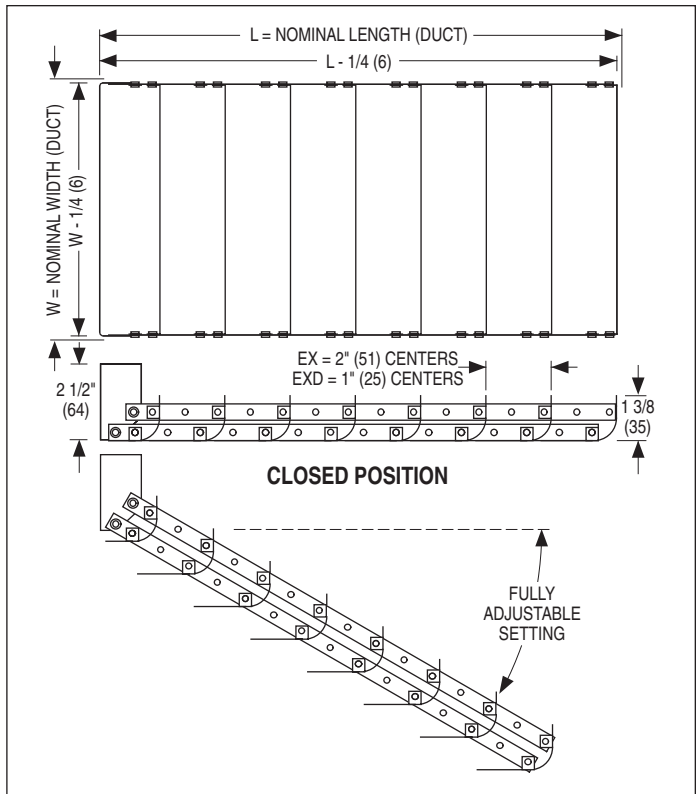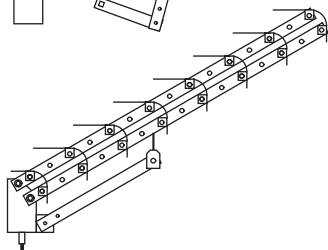

Optional Accessories

RLD

Locking device for Models **EX/EXD-1-R**.

