





STAINLESS STEEL SUPPLY GRILLES & REGISTERS
DOUBLE DEFLECTION • ADJUSTABLE
MODELS: 67DH(-O) AND 67DV(-O) TYPE S

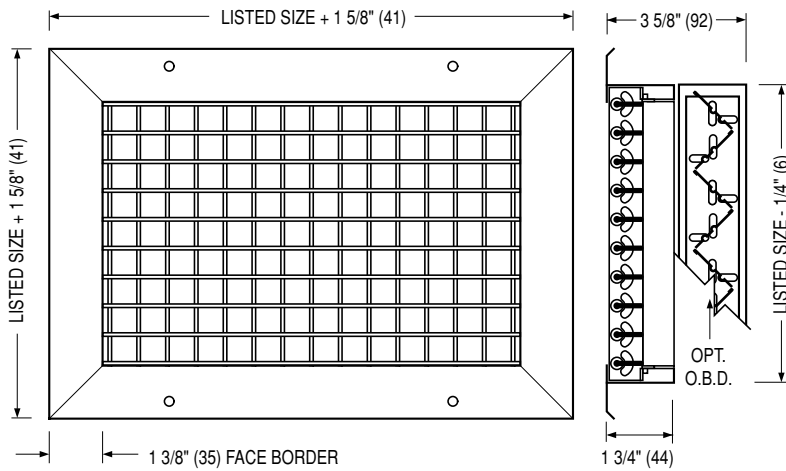

MODEL 67DH
 Double Deflection Grille
 Horizontal Front Blades

MODEL 67DH-O
 Double Deflection Register
 Horizontal Front Blades
 (Includes O. B. Damper)

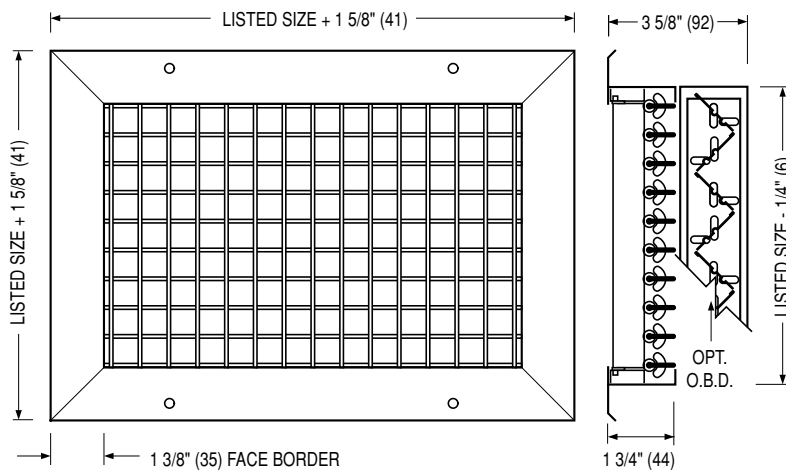

MODEL 67DV
 Double Deflection Grille
 Vertical Front Blades

MODEL 67DV-O
 Double Deflection Register
 Vertical Front Blades
 (Includes O. B. Damper)

DESCRIPTION:

1. Construction: Type 304 stainless steel welded and reinforced frame features hairline mitered corners. Two sets of perpendicular streamlined shaped grille blades on 3/4" (19) centers provide air control in two planes. Blades are individually pivoted to ensure positive positioning when adjusted to desired deflection setting.
2. Optional roll-formed Type 304 stainless steel opposed blade damper has a screw driver operator accessible through face of register.
3. Minimum size is 4" x 4" (102 x 102).
Maximum size is 48" x 48" (1219 x 1219).
4. Type S Surface mount standard frame has a 1 3/8" (35) face border.
5. Standard fastening is Type A countersunk screw holes.
6. Standard finish is #4 Brushed Satin Polished.

OPTIONS:

1. Construction:
 - 316 Type 316 stainless steel.
2. Finish:
 - AW Appliance White.
 - SP Special _____.
3. PFS Stainless Steel Plaster frame
4. Other _____.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

5 - 11 - 15

6700

9 - 22 - 11

6700-2